




Initial Response, Inc.
 PO Box 525, Carrollton, VA. 23314
 Toll Free 1-877-377-4782 www.InitialResponse.com

AED CABINET SIZES

MODEL	SHIP Weight	INSIDE TANK DIMENSIONS			TRIM DIMENSIONS (OD)			ROUGH OPENING IN WALL		
		Height	Width	Depth	Height	Width	Depth	Height	Width	Depth
145SM	8 lbs				13	13½	5¼			
145R1	8 lbs	11	11½	4½	13	13½	5/16	12	12½	4½
147SM	10 lbs				13	13½	7			
147R1	10 lbs	11	11½	6¼	13	13½	5/16	12	12½	6¼
147SR3	10 lbs	11	11½	6¼	14½	15	2½	12	12½	4
180SM	20 lbs				17½	17½	7			
180R1	20 lbs	14	14	6¼	17½	17½	5/16	15	15	6¼
180SR2	20 lbs	14	14	6¼	17½	17½	2½	15	15	4
180SR3	20 lbs	14	14	6¼	17½	17½	2½	15	15	4
184SM	18 lbs				30½	15½	9½			
184R1	18 lbs	27	12	6¼	30½	15½	5/16	28	13	6¼
184SR2	18 lbs	27	12	6¼	30½	15½	2½	28	13	4
184SR3	18 lbs	27	12	6¼	30½	15½	2½	28	13	4
186SM	20 lbs				37¾	15½	9½			

R1= Recessed,
SR2= Semi-Recessed,
SR3 = Semi-Recessed with Rolled Edge,
SM= Surface Mounted

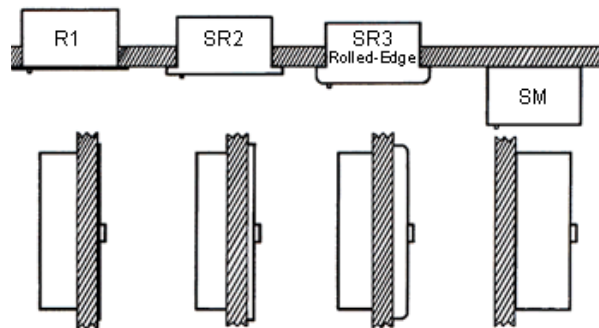

*184 & 186 Combination Cabinets offer an adjustable shelf for Emergency Oxygen or a First Aid Kit.
 The opening for the oxygen cylinder or first aid kit is:
 184 - 22-1/2" H x 12" W x 6" D
 186 - 29-1/2" H x 12" W x 6" D



Initial Response, Inc.
PO Box 525, Carrollton, VA. 23314
Toll Free 1-877-377-4782 www.InitialResponse.com

Optional Alarms & Upgrades:

- **Deluxe Alarm**
 - The Deluxe Alarm is “Key Activated” with piercing sound from 85-120 db.
 - Alarm is set standard to activate when door is open and deactivate when door is closed. Customer may choose one of four different alarm settings:
 - Alarm activates when door is open, deactivates with key only.
 - Alarm activates for 30 seconds, when door is opened.
 - Alarm activates for 3 minutes, when door is opened.
 - External alarm relay connection can be wired into your building security system.

- **Cable Pull Alarm**
 - Piercing sound from 85-120 db.
 - The optional Cable Alarm is activated when the defibrillator is removed from the cabinet.

- **Strobe**
 - Provides a visual indication that the alarm has been activated
 - Standard Red, but other colors available as special order.
 - Strobe use requires the purchase of an alarm

- **Fire Rated**
 - UL approved for fire rated walls.
 - Available in 145R1, 147R1, 147SR3, 180R1, 184SR3 & 186R1 models.

- **Stainless Steel**
 - Available in 147SM, 180SM, 180SR3 & 184SM, & 184R1 models.